



Albury Consolidated Industries (T/A **WiseLiving**)
 A.B.N 34 087 962 338 A.C.N 087 962 338
 PO Box 565 Albury 2640 | 89 North St Albury NSW 2640
 Ph +61 2 6021 2200 | Fax +61 2 60 21 33 01
 email - info@wiseliving.com.au

amdel report

AS/NZS 2918: 2001 Appendix B


CHRISTO

CONFORMANCE CERTIFICATE

Client: Albury Consolidated Industries **Reference Report No:** ATL26-09
Client Ref: Albury Consolidated Industries **Date:** 24/02/2010
Appliance: Christo Freestanding Wood Heater
Test Fuel: Wood Only

Floor Protector: Tested with 30mm thick sheet of fibre-cement (3 x 10mm thick sheets) with a thermal conductivity of 0.23 W/m.K underneath the heater and extending 600mm in front and 200mm from the sides of the firebox door opening. The floor protector has an air gap to the floor of 25mm with supports at 290mm spacing, running front to back.*

Flue System: Standard 200mm flue system with a full length vented galvanised double outer casing covering the full length of flue. Venting consists of a section of perforated material at the base of the casing to a height of 50mm, the diameter being the same as the inner casing, a ring with a series of holes separates the base of the outer to the inner casing.

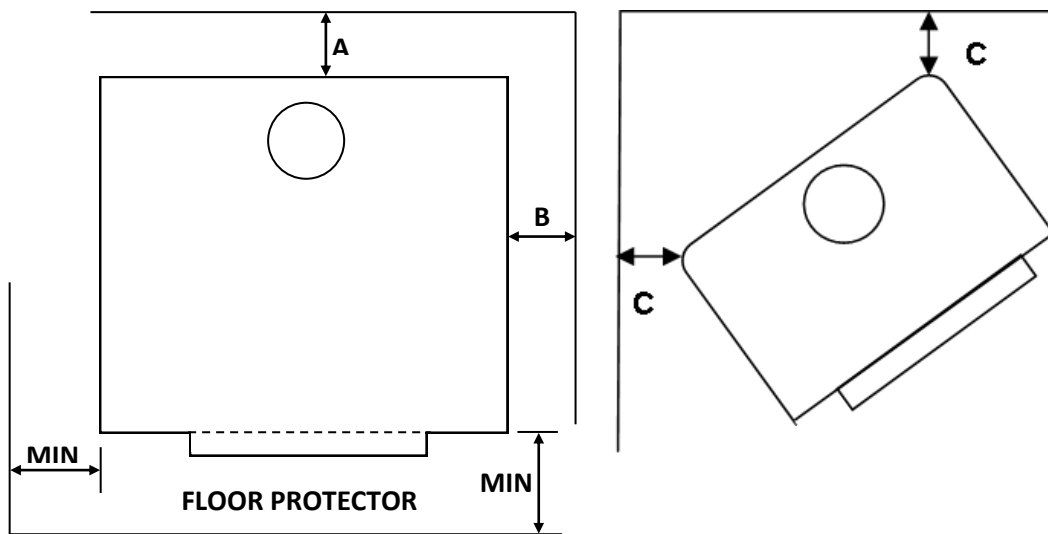

FLUE HEAT SHIELD CONFIGURATION	A (mm)	B (mm)	C (mm)
Flue description – refer to above (flue system)	100	500	Not Tested

*Refer to referenced test report for details of tested configuration

Demi Brown
 General Manager

Michael Gilbert
 Laboratory Manager

AHHA Testing Laboratory shall not be liable for loss, cost, damages or expenses incurred by the client, or any other person or company, resulting from the use of any information or interpretation given in this report. In no case shall AHHA Testing Laboratory be liable for consequential damages including, but not limited to, lost profits, damages for failure to meet deadlines and lost production arising from this report. This document shall not be reproduced except in full, without written approval of the laboratory. Results contained herein relate only to items tested.
 Ref: ATL26-09 Clearance conformance certificate